


## Conventional Manual Call Point

### CCP-E

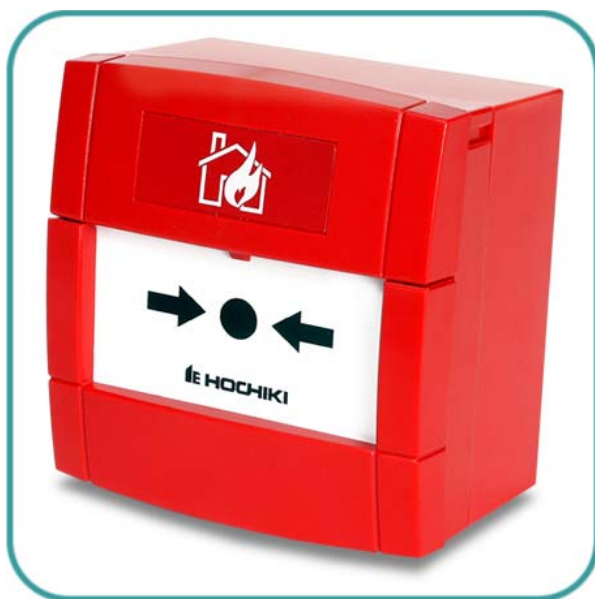

#### Features

- ▶ Approved to EN54-11:2001
- ▶ Terminals can accommodate up to a 2.5 mm<sup>2</sup> solid conductor
- ▶ Other colours available on request
- ▶ Approved by LPCB

#### Description

The CCP-E is a Conventional call-point based upon the industry standard KAC world series housing and features easy to install, push-fit wiring terminals.

The unit can support either a 'Frangible Glass' element or a 'Non Frangible Plastic' element.

#### Specification

|                                |                                                       |            |
|--------------------------------|-------------------------------------------------------|------------|
| Ordering Code                  | CCP-E                                                 |            |
| Nominal operating resistance   | 470 Ω                                                 |            |
| Maximum contact resistance (R) | 200 Ω                                                 |            |
| Ingress Protection Rating      | IP24                                                  |            |
| Operating Temperature Range    | -10 °C to + 55 °C                                     |            |
| Storage Temperature Range      | -10 °C to + 55 °C                                     |            |
| Maximum Humidity               | 95%RH - Non condensing (at 40 °C)                     |            |
| Colour / Case Material         | Red / ABS                                             |            |
| Weight (g) / Dimensions (mm)   | (Flush Mount) 110 / W89 x H93 x D27.5                 |            |
|                                | (Surface Mount with Back Box) 161 / W89 x H93 x D59.5 |            |
| Accessories                    | Frangible Element                                     | KAC/G/HE   |
|                                | Non-Frangible Element                                 | KAC/EWS/HE |